

▼ Shown: XC-1201



- **Lightweight design with integrated handle and carrying strap for portability**
- **Bladder reservoir prevents contamination and allows pump usage in any position**
- **Powerful ½ horsepower motor and 28 volt Lithium-Ion battery deliver exceptional speed and run time**
- **High-strength fiberglass reinforced composite shroud for superior durability in demanding job site environments**
- **Cordless technology eliminates tripping hazards found in other powered pumps**



## Performance of a Powered Pump

## Portability of a Hand Pump



### G2535L Gauge

Minimize the risk of overloading and ensure long dependable service from your cordless pump.



Battery packs contain no cadmium, so they are environmentally friendly. Enerpac encourages recycling.



### 28-Volt Battery

The XC-28V with Lithium-Ion technology for maximum battery performance.



### Battery Charger

1-hour quick charger.

XC-115VC	115 VAC
XC-230VC	230 VAC

◀ Power and simplicity for the toughest jobs.

# Cordless Hydraulic Pump



## XC-Series Cordless Hydraulic Pump

The XC-Series cordless pump is ideal for jobs using small to medium size cylinders and hydraulic tools, and is compatible with over 140 Enerpac tools and cylinders. These cordless pumps combine the performance of a powered pump with the portability of a hand pump making them a perfect solution for remote applications with limited or no access to a power supply or for locations where corded solutions present trip hazards.

The Lithium-Ion battery provides superior run time, even under extreme job site conditions.\*

- 279 cuts of 3/8" reinforcing bar using the WHC-750 cutter
- 112 lifts with the WR-5 spreader
- 44 splits on 1", grade 8 nuts using the NC-3241 nut splitter
- 28 lifts of an RC-104

The XC-Series cordless pump is CSA and CE compliant.

\*Actual number of cycles per charge will vary depending on condition of tool, battery and ambient conditions.



## XC Series



Reservoir Capacity:

**60-120 in<sup>3</sup>**




Flow at Rated Pressure:

**15 in<sup>3</sup>/min.**


Maximum Operating Pressure:

**10,000 psi**

- ① Outlet "Advance" Port
- ② Oil Fill (must use funnel)
- ③ User Adjustable Relief Valve Access Port
- ④ Directional Control Valve
- ⑤ Shoulder Strap Connection Points
- ⑥ Safety Lock Feature
- ⑦ On/Off Switch

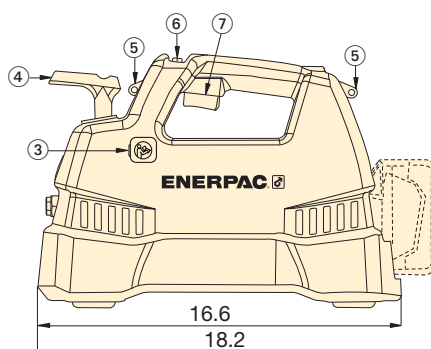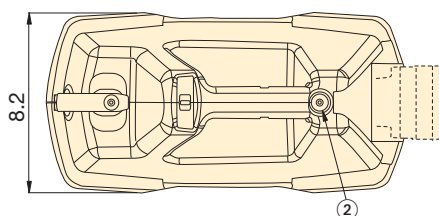

OIL FLOW vs. PRESSURE

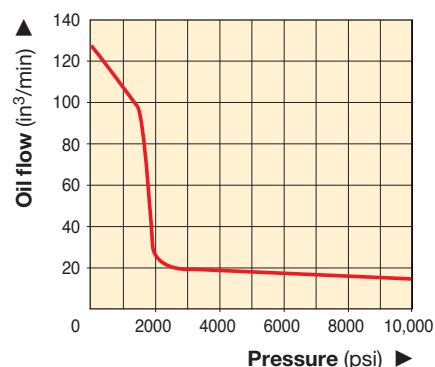

## ▼ SELECTION CHART

Oil Capacity (in <sup>3</sup> )	Model Number	Output Flow Rate (in <sup>3</sup> /min)			Valve Function	Charger Voltage (VAC)	Weight (lbs)
		No Load	2000 psi	10,000 psi			
60	<b>XC-1201MB</b>	125	30	15	3-way, 2-pos.	115	21.85
120	<b>XC-1202MB</b>	125	30	15			23.75
60	<b>XC-1201ME</b>	125	30	15	3-way, 2-pos.	230	21.85
120	<b>XC-1202ME</b>	125	30	15			23.75
60	<b>XC-1201M*</b>	125	30	15	3-way, 2-pos.	-	21.85
120	<b>XC-1202M*</b>	125	30	15			23.75

\* Batteries and charger not included.

▼ Take the battery pump anywhere without power cords or air hoses.

